

FIG. 1

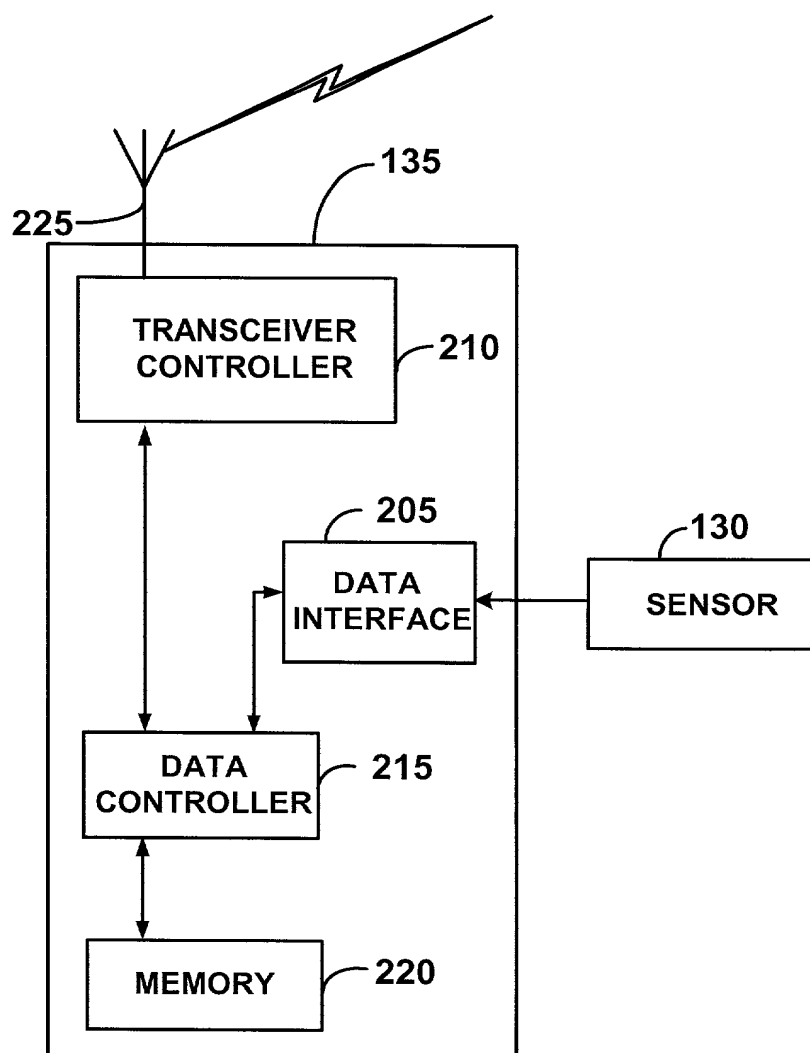


FIG. 2

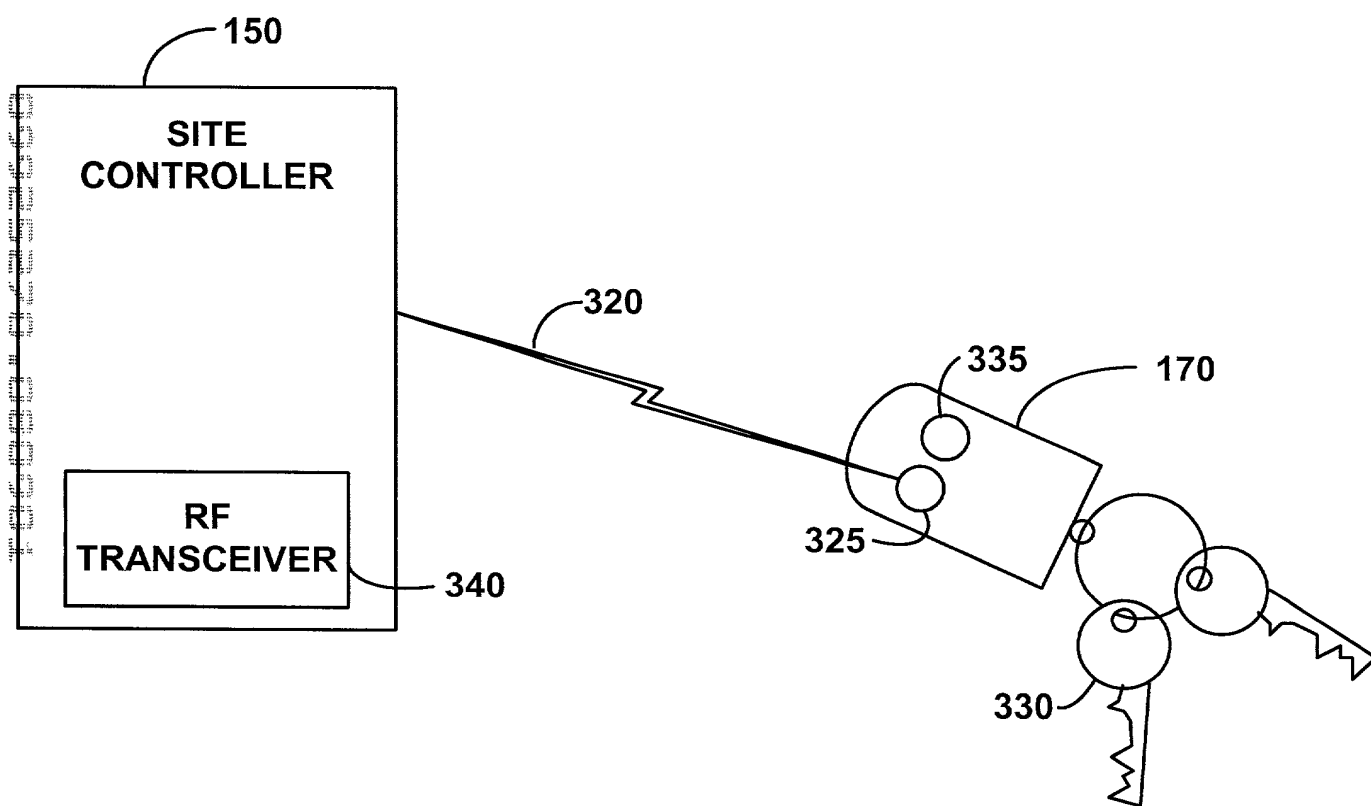


FIG. 3

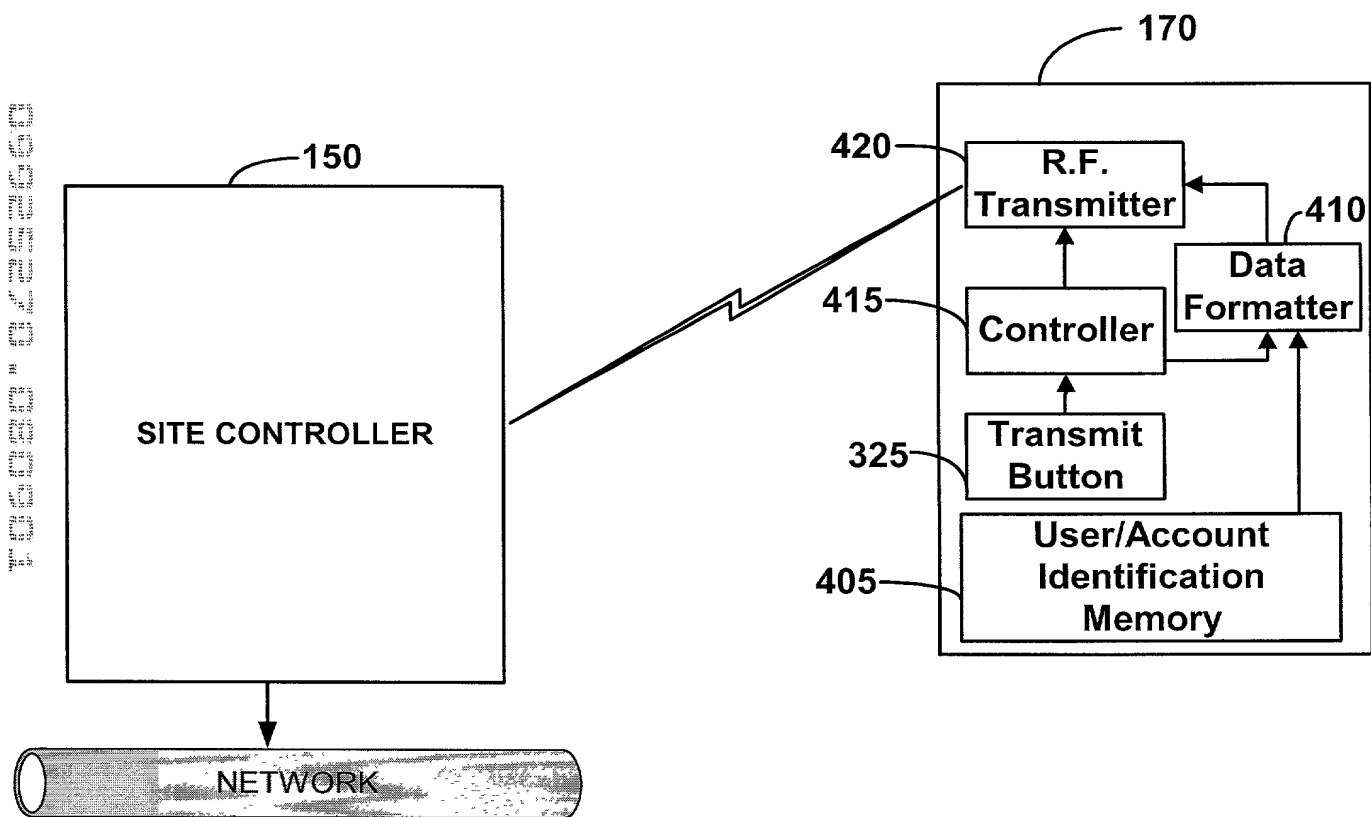


FIG. 4

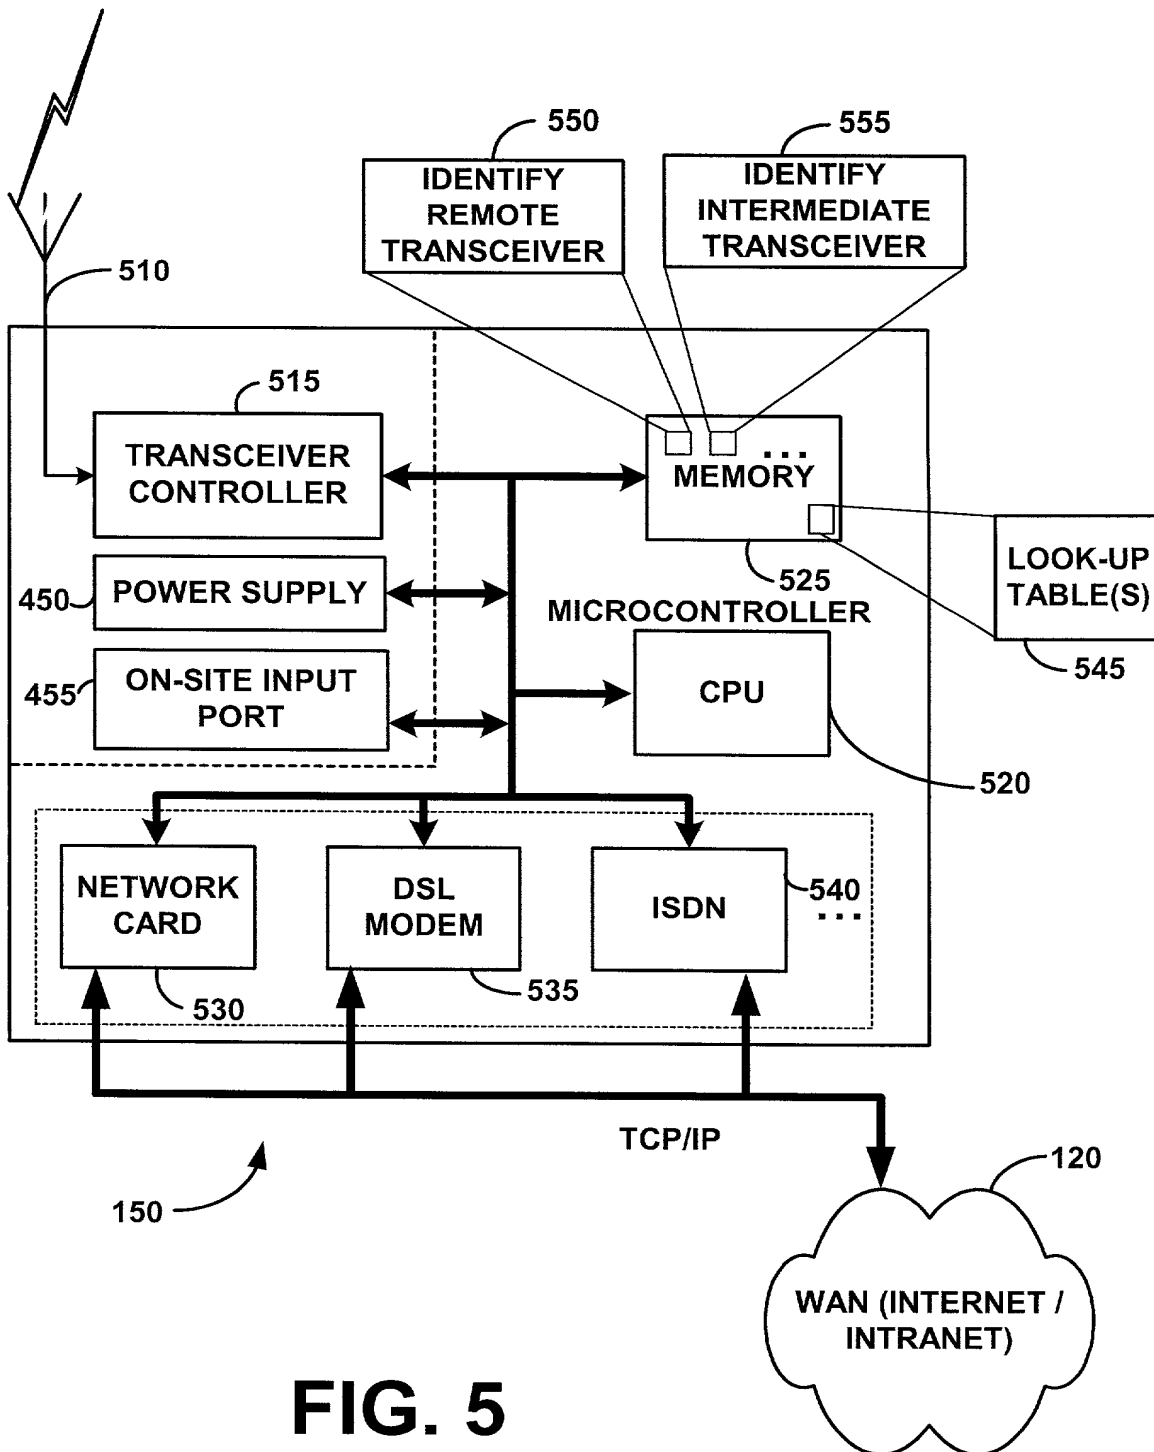


FIG. 5

FIG. 6 Message Structure

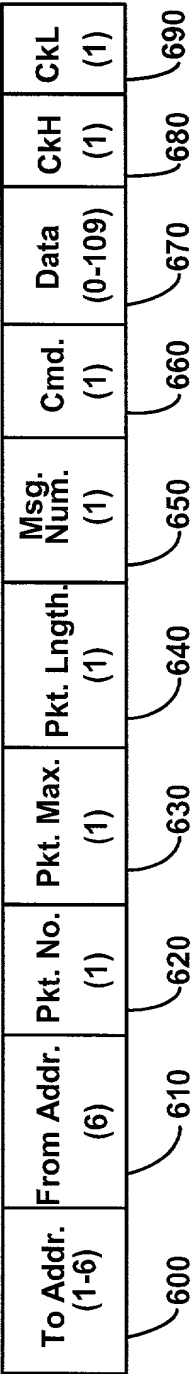


FIG. 7

<u>"To Address"</u>		<u>Byte Assignment:</u>
MSB - Byte 1 Device Type		FF-F0 (16) - Broadcast All Devices (1 Byte Address)
		EF-1F (224) - Device Type Base (2 to 6 Byte Address)
		0F-00 (16) - Personal Transceiver Identification (6 Byte Address)
Byte 2 Mfg./Owner ID		FF-F0 (16) - Broadcast all Devices (Byte 1 Type) (2 Byte Broadcast Address)
		EF-00 (240) - Mfg./Owner Code Identification Number
Byte 3 Mfg./Owner Extension ID		FF-F0 (16) - Broadcast all Devices (Byte 1 & Byte 2 Type) (3 Byte Broadcast Address)
		EF-00 (240) - Device Type/Mfg./Owner Code ID Number
Byte 4		FF-F0 (16) - Broadcast all Devices (Byte 1 & Byte 2 Type) (4 Byte Broadcast Address)
		EF-00 (240) - ID Number
Byte 5		(FF-00) 256 - Identification Number
Byte 6		(FF-00) 256 - Identification Number

Central Server to Personal Transceiver - Broadcast Message - FF (Emergency)

Byte Count = 12

To Addr. (FF)	From Addr. (12345678)	Pkt. No. (00)	Pkt. Max. (00)	Pkt. Lngth. (0C)	Cmd. (FF)	CkH (02)	CkL (9E)
------------------	--------------------------	------------------	-------------------	---------------------	--------------	-------------	-------------

FIG. 8

